


<https://www.skyrc.com/pc3000h>

SPECIFICATIONS PC3000H Charger

Size and Weight

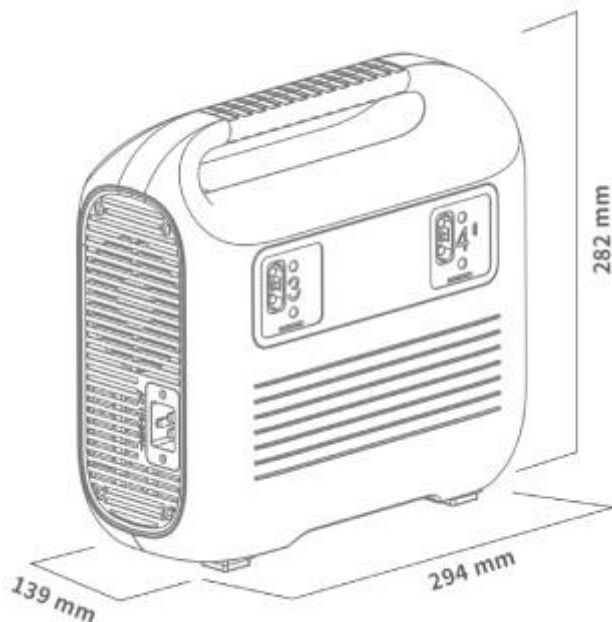

Housing Material: Plastic (Flame Retardant PC+ABS)

Size: 294mmx139mmx282mm

Weight: 6Kg

Battery Type : Lithium Battery

LiPo Battery Cells : 12S/14S (4.2V)

LiHV Battery Cells : 12S/14S (4.35V)

Charge/Discharge

AC 220V

Fast Charge Current: max. 60A single channel

Standard Charge Current: max. 30A single channel,max. 60A Dual channels in total

Slow Charge Current: max. 20A single channel; max. 60A multi channels in total

AC 120V

Fast Charge Current: max. 1200W single channel

Slow Charge Current: max. 20A single channel; max. 1200W multi channels in total

Storage Discharge Power

Main Port: 50W Max.

Balance Port: 80W Max. (The current will be adjusted based on the balance port's temp)

Max Charge Output Power

AC220V Output Power: 3000W

AC120V Output Power: 1200W

Discharge Power : 60W

Charging Mode : Fast charge /Standard Charge/ Charge / Storage

Working and Storage

Working Temperature: 0°C-40°C

Working Humidity: 0%-75%

Storage Temperature: -10°C-70°C

Storage Humidity: 0%-75%